

## Hoses

# Geoflex Exhaust HT1100

GeoFlex Exhaust HT1100 is a high temperature hose designed for extraction or air supply of hot air, fumes, smoke or dust within the industry.

Suitable for extraction of exhaust gasses from big combines or excavator etc., or extraction of air from a heater.

### Material

**3 ply, Inner ply:** high temperature stainless steel fabric,

**Middle ply:** high temperature isolation fabric,

**Outside ply:** PU- coated high temperature fabric, reinforced by woven in stainless steel wire.

### Colour

Silver-grey

### Length

1-10 meters


Special-length on request

### Temperature resistance

- 60° C to + 900° C - briefly 1100° C

### Application

Spark extraction, suction of exhaust gases, flue gas extraction and suction of other hot fumes, gases or dust in all fields of industry.

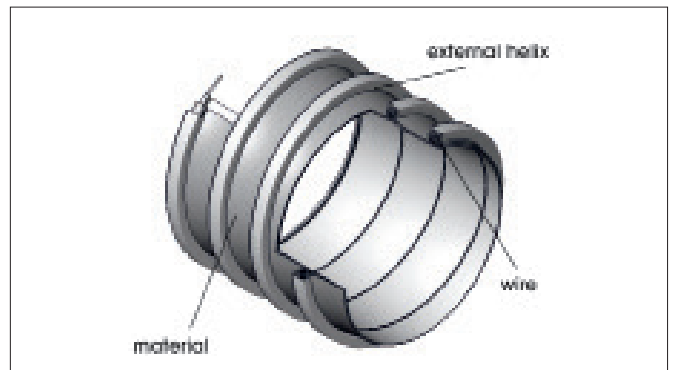

### Properties

Good temperature resistance, outer wear strip, flame retardant, silicone free, excellent axial compressibility.

## Technical specifications

Art. No.	Ø (mm)	Vacuum Pa.	Bend. Rad. (mm)	Weight (kg/m)
09-140 GeoFlex Exhaust HT1100	102	18.000	64	13.000
09-141 GeoFlex Exhaust HT1100	127	12.000	77	11.000
09-142 GeoFlex Exhaust HT1100	152	7.500	89	7.000
09-143 GeoFlex Exhaust HT1100	160	7.000	94	6.500
09-144 GeoFlex Exhaust HT1100	200	4.500	114	6.000