

## Hoses for ventilation


# Quick couplings

The Geovent quick couplings for medium pressure are manufactured in powder coated steel (RAL 1007). The quick couplings are supplied for installation on the wall or suspended from the ceiling. The couplings are ideal for systems with several non-simultaneous extraction spots. The hose part is also manufactured in powder coated steel. The solid spring-loaded lid locks the hose part and switches off the airflow. The ranges of use are numerous - for example extraction of welding fumes, exhaust fumes, dust, etc. The dimensions are  $\varnothing 80$  and  $\varnothing 100$  mm.



Quick-action couplings

### Dimensions

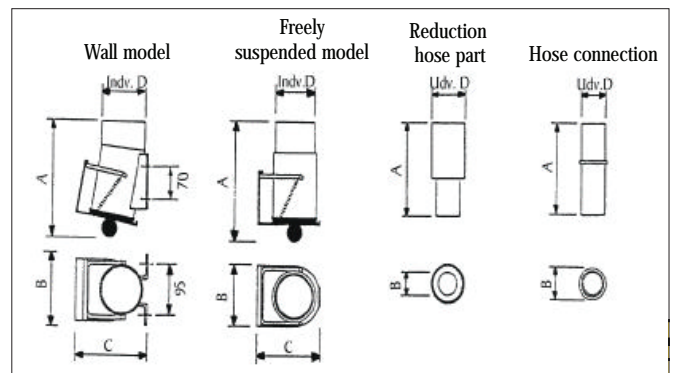

Art. No	Description
05-005	Quick coupling 80V for wall mounting
05-008	Quick coupling 80L hanging
05-006	Quick coupling 100V for wall mounting
05-009	Quick coupling 100L hanging

### Ordering table - Couplings for medium pressure

Area of Application	Model	Max. Air-flow (m <sup>3</sup> /h)	Art. no.				Measurements in (mm)			
			Vægk.	Løsh. k.	R. sl. Del f/k	Sl. Del f/k	A	B	C	D
Welding-fumes	80	300-400	05-005	-	-	-	255	115	160	80
	80	300-400	-	05-008	-	-	256	100	135	76
Oil Mist Soldering Fumes	80	300-400	-	-	-	05-011	250	87	-	75
	100/80	400-600	-	-	05-013	-	250	75	-	100
Grinders Lathes	100	400-600	05-006	-	-	-	260	130	175	100
	100	400-600	-	05-009	-	-	256	130	157	100
	100	400-600	-	-	-	05-014	250	112	-	100