

Geovent Motordamper-230

From $\varnothing 80$ mm to 400 mm



GEOVENT Motordamper-230 is specially designed for use in point extraction systems that require opening and closing of the dampers by suction points. Geovent Motordamper-230 is a tight damper that can open 90° in 35 seconds.


This damper is available with ON/OFF or modulating motor for accurate control of the air.

The damper is available from $\varnothing 80$ mm to $\varnothing 400$ mm.



Power supply:	AC 100 ... 240 V
Power consumption:	2 W @ nom. Torque 0.4 W @ Idle
Wire dimmensions:	4 VA
Connection:	Cable, 1 m
Torque:	Min 5 Nm
Angle of rotation:	90°
EMC-emission:	CE acc. to 89/336/EEC
LVD:	CE acc. to 73/23/EEC
Ambient temperature:	0 - 50 °C
Protection class:	IP54
Sound power level:	Max. 45 dB(A)

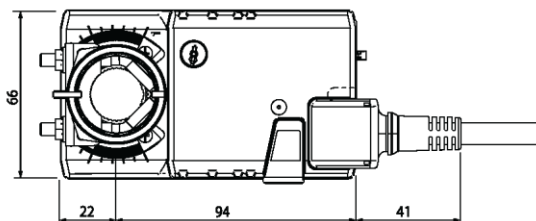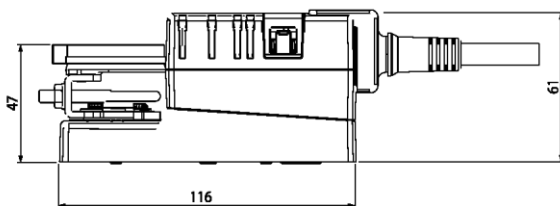

Axle	Length	
	min. 37	6 ... 20

Art. No.	
61-083	Motor Damper, 220V $\varnothing 100$ Tight
61-081	Motor Damper, 220V $\varnothing 125$ Tight
61-084	Motor Damper, 220V $\varnothing 160$ Tight
61-085	Motor Damper, 220V $\varnothing 200$ Tight
61-104	Motor Damper, 220V $\varnothing 250$ Tight
61-105	Motor Damper, 220V $\varnothing 315$ Tight
61-088	Motor Damper, 220V $\varnothing 400$ Tight

