

Portable fan

Mobile extractor with ASA arm

The mobile extractor with a fixed ASA3-arm is for use in i.e. repair shops for gluing, welding and exhaust gases.

Select arm type and hood according to task.

Normally this extractor is fitted with our ASA-3 arm and our MSFG fan.

Use of the mobile extractor

The extractor is for extraction of welding fumes, vapors, etc. where it is not possible to establish permanent extraction points.

The fan must not be used in categorized areas such as ATEX zones, e.g. for extraction of aluminum, flour, textile and wood dust as well as other media such as is associated with explosion hazard.

Handling

Handle and move the mobile extractor by pulling the unit.

The mobile extractor is equipped with a MSFG-200-3 fan, 3x400V with 10m cable and ASA-3 Arm \varnothing 160mm. It comes with 5m discharge hose \varnothing 160.


Black painted steel construction with wheel and low center of gravity.

Height (without arm): 1700mm



Mobile extractor with ASA arm

Do not start the Geovent Mobile extractor without the discharge hose mounted, as it can cause engine overload.

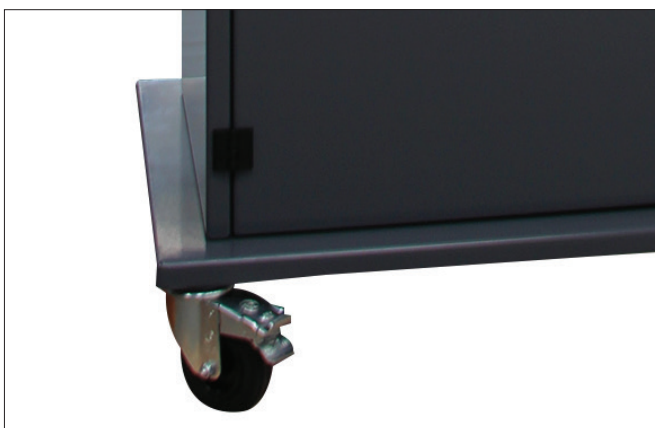

Ordering table

Art. No.	Description
10-270-2W	Mobile Extractor with 2m ASA
10-270-3W	Mobile Extractor with 3m ASA

Accessories for the ASA arm

12-005	Damper \varnothing 80 mm
12-006	Damper \varnothing 100 mm
12-012	Damper \varnothing 125 mm
12-008	Damper \varnothing 160 mm
12-009	Damper \varnothing 200 mm